

***Xtreme PC LXD8941W:
Integrated Wi-Fi Thin Client***

Xtreme PC LXD8941W Wi-Fi Enabled thin client provides you with the flexibility and modularity to connect Chip PC Technologies' high-end, powerful thin client to any network infrastructure available in your organization, either LAN or Wi-Fi based.

Xtreme PC LXD8941W was specifically designed to include integral Wi-Fi module and features strong performance and support of latest Citrix and VMware technology in a small footprint device.

Xtreme PC LXD8941W smoothly operates with either Wi-Fi or CAT5 LAN networks. The combination of ultra-green platform with very low power consumption, state of the art high-reliability hardware design and unparalleled management software position it as the ultimate choice for enterprise users.



Highlights at a Glance

Fully Managed from Remote

Fully managed by Xcalibur Global management suite in any environment (LAN, WAN, Remote Site)

- **Deployment:** Effortless 'out of the box' deployment. Once connected to the network settings are applied seamlessly
- **Configuration:** 100% of the firmware settings can be set by Policies to be applied on multiple devices from remote locations using existing AD structure
- **Monitoring:** Sends real time information to the Xcalibur Global management suite and can be shadowed by VNC to offer real time interaction and help desk support
- **Ease of use:** No need to clone & redeploy multiple firmware master copies, no scripts or configuration files

Green Devices

- Excellent power/performance ratio, only 4-6W power
- Designed for >10 years life cycle

Secure

- **Device logon:** Active Directory user credentials can be set for device access – just like a regular PC. Session logon: PC/SC Smart Card support (external reader)
- **Physical security:** Kensington lock slot
- **Peripheral security:** Remotely restrict USB peripheral usage
- **Network security:** Support 802.1x for wired LAN and Wi Fi
- **Code security:** Virus-immune, no patches or Antivirus required

Easy to Update

- **Software add-ons:** Install add-ons (ICA/RDP/ VMware View/Browser and more) independently without upgrading the entire Operating System
- **Safe to update:** the option to separately install add-ons is more stable and consumes less network bandwidth

Citrix Environments:



- » Full Support for Citrix® HDX
- » Support, Citrix XenApp and XenDesktop environments
- » Remotely configurable ICA Connections, Citrix® PNAgent & Web Interface settings
- » Boot into Kiosk Mode with auto-launch Citrix Connection upon device start up
- » Outstanding, PC-like in-session performance
- » Single Sign On (SSO) with Device Logon credentials Pass-through into the Citrix session.
- » ICA Client version can be updated from remote

Microsoft RDS:



- » Support Microsoft Windows Terminal Server 2003 / 2008
- » Remotely configurable RDP Connections
- » Rdesktop 1.7 optimized for Terminal Server 2008R2
- » Boot into Kiosk Mode with auto-launch RDP Connection upon device start up
- » Outstanding, PC-like in-session performance
- » Single Sign On (SSO) with Device Logon credentials Pass-through into the RDP session.
- » RDP Client version can be updated from remote


VMware View:




- » Support VMware View environments
- » Remotely configurable VMware View™ server settings
- » Connect to VMs using Rdesktop 1.7
- » SSL Tunneling support
- » Boot into Kiosk Mode with auto-launch RDP Connection upon device start up
- » Single Sign On (SSO) with Device Logon credentials Pass-through into the RDP session.
- » VMware View Client version can be updated from remote

| Product Specifications <i>Xtreme PC LX D8941W</i> | |
|---|--|
| Processor | <ul style="list-style-type: none"> Marvell Dove, Armada 510 933MHZ |
| Memory | <ul style="list-style-type: none"> 1GB, DDR3 @ 933MHz |
| Mass Storage | <ul style="list-style-type: none"> 2GB, High reliability eMMC NAND flash Optional externally accessed MicroSD slot |
| Display Support | <ul style="list-style-type: none"> One DVI-I port Optional DVI-I to DVI-D plus VGA-monitor splitter cable (sold separately) Optional DVI-I Port to VGA (DB-15) adapter (sold separately) Display Data Control (DDC) for automatic setting of resolution and refresh rate |
| Resolutions | <ul style="list-style-type: none"> Single: Up to 1920x1200 Pixels @ true color (32 bit) Dual: Up to 1920x1080 Pixels @ true color (24 bit) |
| Video Player | <ul style="list-style-type: none"> Various video codecs, including DivX HD, H.264 (MPEG4), WMV9/VC1 Up to 1080p local browser Flash support |
| Audio Support | <ul style="list-style-type: none"> High Definition Audio Codec Stereo Audio Output – 3.5 mm (1/8 inch) Audio-Out Jack; 16-bit Stereo, 96KHz sample rate Microphone Input – 3.5 mm (1/8 inch), 8 bit Software volume / mute control |
| Input / Output ports | <ul style="list-style-type: none"> 6 x USB 2.0 ports (2 front, 4 back) |
| Operating System | <ul style="list-style-type: none"> Chip PC ThinX (Linux-based kernel) |
| Firmware | <ul style="list-style-type: none"> ICA 12.5.1 with full Citrix® HDX support for Linux RDP (RDesktop 1.7) FreeRDP Client VMware Horizon View client Web Browsers: Firefox or Google Chrome Flash 10 Player VNC remote shadowing Local Media Player (Totem) X-Windows 7.2 server User Scripts plug-in PDF Viewer Customized System Screen to reflect corporate logo Terminal Emulation SIP phone plug-in JVM and Java plug-in for browser |
| Network | <ul style="list-style-type: none"> RJ-45 jack 10/100/1000 Base-T Ethernet LAN with Auto-negotiate TCP/IP with DNS and DHCP Optional internal wireless 802.11 b/g/n (single antenna) <ul style="list-style-type: none"> IEEE 802.1X Wireless security: <ul style="list-style-type: none"> 64/128/152 bit WEP WEP/WPA2, WPA-PSK/ WPA2-PSK |
| Security | <ul style="list-style-type: none"> Kensington lock slot |
| Power | <ul style="list-style-type: none"> Device input: 12VDC Idle power consumption 2W, Operating power consumption: 4-6W Wall-mount power supply input: Worldwide auto-sensing 100-240VAC, 50/60 Hz, 12V/1.5A (included) |

| Product Specifications Xtreme PC LX D8941W | |
|---|--|
| Physical Characteristics | <ul style="list-style-type: none"> • Dimensions: 8.9(W)x14(D)x2.3 (H) cm/3.5(W)x6.22(D)x0.92(H) inch • Device weight: 180 gr. (6 oz.) • Shipping Weight: 0.65 Kg. (1.43 lbs.) |
| Environmental | <ul style="list-style-type: none"> • Temperature range: Operating - 32°F to 104°F (0°C to 40°C) • Storage: -46°F to 163°F (-20°C to 70°C) • Humidity: Operating - 20 to 80% non condensing; Storage - 0 to 90% non condensing • Altitude: 0 to 42,000 ft |
| Regulatory Compliance | <ul style="list-style-type: none"> • Safety: EN/IEC60950-1 • EMI/EMC: FCC Class B, CE Mark, EN61000-6-3, EN61000-6-1, VCCI • Environmental: WEEE, RoHS Compliant |
| Optional Accessories to be purchased separately | <ul style="list-style-type: none"> • Kensington lock with 3ft cable Visit www.chippc.com for an updated list |
| Enclosure Color | Black |
| Warranty | <ul style="list-style-type: none"> • 1 year automatic Warranty, additional 2 years pending on product registration • Extended Warranty for years 4 & 5, optional, to be obtained during first year after purchase |

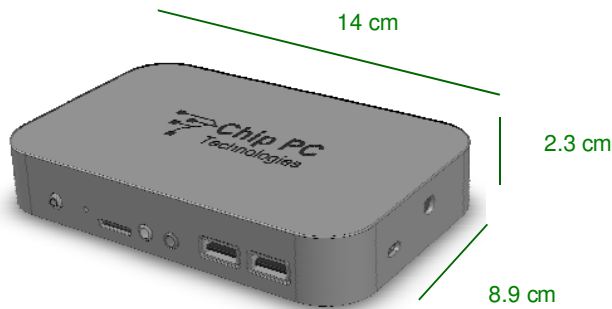

Overview with sizes



Kensington Lock slot

Side view



Power | SFP | 4XUSB | DVI-I

Back view



ON/OFF | Reset | uSD Card (optional) | Audio In/Out | 2 X USB

Front view

- Monitor, keyboard and mouse - to be purchased separately
- Xcalibur Global & Plugin licenses - to be purchased separately
- Above features are supported in latest firmware image version released
- Actual display support is dependent on display hardware and cable quality; some of the resolutions and display modes described above may not be supported by certain displays or cables
- The equipment shall be used only with the power supply shipped with it, which meets the requirements for a Limited Power Source according to the IEC/EN 60950-1 standard.
- Specifications are subjected to change without prior notice

The Company

Since its inception, Chip PC has been a world leader in server-centric-computing. A private company with branches in Europe and the U.S., Chip PC develops and manufactures, top notch, thin, smart and zero clients and management systems.

Chip PC's team of dedicated researchers and developers have combined their years of experience to yield novel ideas and deliver an outstandingly innovative family of thin, smart and zero client products.

With the award winning Xcalibur Global management system and innovative thin, smart and zero units, Chip PC maintains a leading market position with its end-to-end solution.



The End-to-End Solution

Chip PC is aimed at solving the thorny problem of combining intelligent client networking with sophisticated management and control. Chip PC's unique solution constructs a ground-up client network from the revolutionary Jack PC that fits into a standard wall jack, through the NG Series', state-of-the art, powerful, desktop units and miniature Plug PCs.

These server-centric, revolutionarily designed, units are comprehensively managed by Chip PC's Xcalibur Global. The Xcalibur Global Management System simulates an Active Directory environment with intelligent usage of its management principles of policies and tools and offers flexible management that applies down to the specific needs of every particular client unit or user.



Chip PC HQ
Tel: +972 4 8501121
e-mail: info@chippc.com

Chip PC Inc US
Tel: +1 866-674-1678
e-mail: info.us@chippc.com

Chip PC UK
Tel: +44 203 445 5033
e-mail: info@chippc.co.uk

Chip PC France
Tel: +33 1 83 62 05 12
e-mail: info.fr@chippc.com

Chip PC Germany
Tel: +49 201 4389 05 - 0
e-mail: info@chippc.de