



ChipPC AiO 20 All-in-One Solution

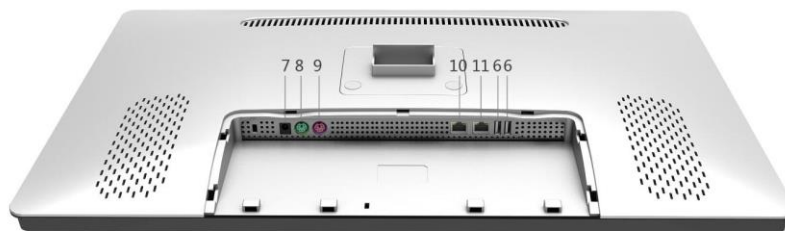
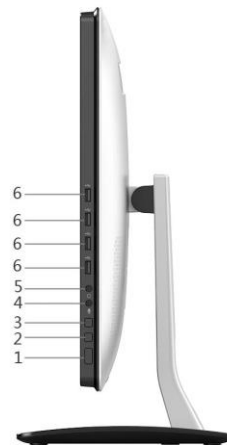
Windows & Linux











Hardware

Specification

| | | |
|-------------------------------|--|---|
| Processor | CPU | Intel D2560 2.0GHz Dual-core |
| Memory Storage | RAM DOM | 2GB DDR3 RAM (Up to 4GB) 8GB mSATA DOM (Can extend SATA hard disk) |
| I/O Peripheral Support | USB 2.0 PS/2 | X6 (Rear x2, side x4) X2 |
| Networking | LAN | X2 (10/100/1000 Base-T Fast Ethernet, RJ-45) Optional Mini PCIE / USB wireless module |
| Display Support | Screen Resolution | 23.6 inch up to 1920*1080@60Hz |
| Audio | Line-out Mic-in | - Output: 1/8-inch mini, full 16-bit stereo - Input: 1/8-inch, 8-bit mini microphone |
| OS | Linux4.30 WES7 SP1 | Citrix Receiver 12.1.2 CT Vision Client 5.20 RDP 1.6.0 Citrix ICA/HDX RDP/VMware View PCoIP RDP 5.2 RDP 6.1.7601 Citrix Receiver 13.3 VMware View Client 5.1 RDP 7.1 (support RemoteFX) Citrix ICA/HDX RDP/VMware View PCoIP |
| Power | Adapter | 12V / 5A AC |
| Environment | Operation Temperature Relative Humidity | 0°C - 40°C 30% to 90% non-condensing |
| Mountings | | Feet Stand Hanging in the wall |
| Lock hole | | X1 |
| Dimensions | Fuselage | 601 x 367 x 47 mm / 601 x 418 x 206 (including the base) |
| Weight | Net weight | 7.86kg |

Specifications subject to change without notice. All trademarks are acknowledged and remain the property of their respective owner.



| No. | Interface name | Icon |
|-----|----------------------------|---|
| 1 | Power button |  |
| 2 | Reduce screen brightness |  |
| 3 | Increase screen brightness |  |
| 4 | Mic-in |  |
| 5 | Line-out |  |
| 6 | USB port |  |
| 7 | Power in |  |
| 8 | PS/2 mouse |  |
| 9 | PS/2 keyboard |  |
| 10 | RJ-45 |  |